


## TECHNICAL INFORMATION

FOR PROFESSIONAL USE ONLY

### PRIMERO UNDERBODY WAX UV INSPECT UNDERBODY AND CAVITY PROTECTION

#### PRODUCT DESCRIPTION

An anti-corrosion agent designed for long-term protection of the underbody and closed body sections (e.g. doors, bonnet, sills) against corrosion. The product has very good penetration properties, providing a self-healing effect of the coating. Enriched with a blue UV pigment, it allows easier inspection of application quality when using a UV lamp. It forms a flexible, tight coating that protects against the effects of water and road salt. The product is not suitable for overcoating with any paint systems.

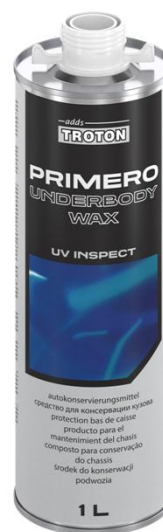

#### VOLATILE ORGANIC COMPOUNDS

VOC = 502 [g/l]

The product fulfils the requirements of the European Directive (2004/42/WE), which defines the volatile components content for that products category (cat. B/5) at the level of 840[g/l] for the ready product.

#### PHYSICAL AND CHEMICAL PROPERTIES

Colour:	transparent
Volume :	1 l
Density*:	0,86 kg/l
Viscosity:	30-40 seconds (Ford Cup 4 mm, DIN 53211)
Solid content:	approx. 46% (DIN 53216)
Consumption:	approxk. 0,2 kg/m <sup>2</sup>
Temperature resistance:	-25 to +180°C
<u>Drying time:</u>	
- touch dry*:	3 h (±100 µm)
- fully dry*:	5 h (±100 µm)

\* at temperature of 20°C and relative humidity 65%

#### USAGE

- Suitable for a wide range of industries, including automotive, agriculture, forestry, shipbuilding and metalworking .
- Ensure the surface is clean, dry, dust-free, degreased and free from corrosion prior to application.
- Shake the container thoroughly for approximately 2 minutes before use.
- Can be applied by pneumatic spray , hydromatic spray or spray gun.
- Recommended coating thickness: 200 µm (2 coats)
- Contaminated surfaces and equipment can be cleaned with an acrylic thinner.

**Caution:** For safety reasons always comply with information provided in the Material Safety Data Sheet.

**STORAGE**

The product should be stored in dry, cool and well-ventilated areas, away from sources of fire, heat and direct sunlight. Recommended storage temperature: 10 to 30°C.

**WARRANTY PERIOD**

2 years from the date of production

**PRODUCT**

addsTROTON PRIMERO WAX; underbody and cavity protection  
transparent 1l

**ART. No.**

300010920

**LIMITATION OF LIABILITY**

The information contained in the TDS is up-to-date and correct on the day the information is released.

Because TROTON can not control or predict the conditions under which a product will be used, each user should review information in the specific context of the intended usage. To the maximum extent permitted by applicable law, TROTON shall not be liable for damages of any kind arising from the use or reliance on information contained in this TDS.

Given the variety of factors that can affect the usage and application of the TROTON product, some of which are only within the user's knowledge and control range, it is essential that the user evaluate the TROTON product to determine if the product is fit for a particular purpose and whether the product is suitable for the user's usage.

Under no circumstances shall TROTON be liable to the user or any third party for any indirect, derivative, incidental, special or punitive damages, including loss of profits resulting from the use of products manufactured by TROTON and / or TROTON's services.

All information are based upon the precise laboratory studies and many years of experience. The good market position does not release us from the constant supervision of our products quality. However, we are not responsible for the final effects of the improper storage or application of our products, as well as for work inconsistent with the good craft practice.

TROTON Sp. z o.o.  
Ząbrowo, Poland.